



Driver Monitoring and Driver Detection System using Computer Vision

Chirag Gupta
Department of Computer Science &
Information Technology
Meerut Institute of Engineering and
Technology, Meerut
chirag.gupta.csit.2019@miet.ac.in

Rishabh Yadav
Department of Computer Science &
Information Technology
Meerut Institute of Engineering and
Technology, Meerut
rishabh.yadav.csit.2019@miet.ac.in

Vinit Bansal
Department of Computer Science &
Information Technology
Meerut Institute of Engineering and
Technology, Meerut
vinit.bansal.csit.2019@miet.ac.in

Rishav Chauhan
Department of Computer Science &
Information Technology
Meerut Institute of Engineering and
Technology, Meerut
rishav.chauhan.csit.2019@miet.ac.in

Joney Kumar
Department of Computer Science &
Information Technology
Meerut Institute of Engineering and
Technology, Meerut
joney.kumar@miet.ac.in

DOI:10.48047/ecb/2023.12.si4.731

ABSTRACT

Motorist's lack off attention is one in every of the leading reasons for road accidents that result in bereavement. Hence cause of motorist's exhaustion and its indication is a very important analysis space. The present strategies area unit either automobile based or behavioural based mostly or physical based and a few of those strategies area unit indiscreet and distract the driving force, some of them need costly sensors and knowledge handling. In this paper we tend to propose a less expensive, wherever a digital camera accounts the videography, motorist's fascial benchmarks is identified in each frame using image process technique. Driver's attention is analysed after the attention ratio is computed and bets on the values of the facial benchmark on the distinctive facial area unit jagged.

KEYWORDS

Dlib, OpenCV, Computer Vision, Eye Aspect Ratio, Detection, Driver, Facial Landmarks, Face Detector, Face Predictor

I. INTRODUCTION

Drowsiness is a feeling of "needing to sleep," whereas tiredness is "fatigue brought on by overwork." In any case, one is unaware of local happenings like intoxication. Driving when fatigued puts many lives on the road at danger. This little sleep might result in collisions, needless road cuts, and automobile accidents. Our study uses computer vision to identify driver tiredness in order

to solve this issue and ensure driving safety. Driver exhaustion may be a vital considers various accidents. Late measurements gauge that yearly twelve hundred passing's and seventy-six thousand wounds may be attributable to exhaustion-related clatters. Motorist temporary state and exhaustion may be a major issue which ends into several automobile accidents. Maintaining and developing technologies that may expeditiously stop or find temporary state at the steering-wheel and warn the driver beforehand a catastrophe may be a most important challenge in the case of accident bar system. Owing to the hazard that momentary state will cause on the roads, some of the strategies have to be compelled to be developed for avoiding offsetting its effects[6]. Through the trendy technology and period scanning systems mistreatment cameras, we are able to stop most important misfortunes on the highway by informing automotive driver UN agency is sense drowsy through a momentary state recognition system. The agenda of this kind of project is to form an example temporary state detection system. One of the main targets is on developing a framework that may unceasingly find whether or not the motorist's eye lid area unit is shut or open... By watching eyes, we tend to believe we are able to detect the indications of motorist exhaustion in primary state to avoid an automotive accident. The recognition of exhaustion entails observant eyes actions, wink patterns throughout a series of images of face expression drowsiness detection for motorised vehicles using

computer vision and web push notifications is taken from [7]. They have created a computer vision-based sleepiness system for cars in this study, complete with alert noises and online push messages. "Driver Drowsiness Detection System Using Computer Vision" from [8]. This study's goal is to identify motorist tiredness by studying anthropological eyes blinking using a new facial benchmark identification technique and using E.A.R. (eye aspect ratio) for quick, easy, and accurate blink detection. The device proved successful in identifying driver tiredness because it could reliably and precisely quantify the degree of eye opening. This warning system can be used in real-time because facial landmark detection only suffers from a very little performance cost [21][22][23].

II. LITERATURE SURVEY

Manu (2016) illustrates a practical method for identifying fatigue in [1] through three unique processes. Face highlights are detected the three steps include Viola Jones: the eye following, the yawning discovery. The framework is light after the face is recognised. The bulk of the non-facial components by fragmenting the skin region solely and examining only the chromatic sections. Visualise foundations that are based on skin tone. The following of eyes and relationship coefficient layout coordination is accomplished. Yawning acceptance an Advanced Driver Assistance System (ADAS) module was created by Belal et al. (2013) in [2] to decrease the less accidents brought on by driving impairment, increasing the security of transportation. This programme manages the detection a system for calculating driver fatigue based on visual data and artificial intelligence. Jang et al. (2018) developed a novel fatigue detecting system in [3]. A camera located close to the dashboard is used by the algorithm. The proposed computation identifies the facial benchmark of the motorist in the picture and calculates the landmarks on the aspect of the facial expression. A Modified Census Transform-based AdaBoost classifier is used in the recommended computation. To identify the face, use the highlights. Anirban et al. (2018) created a mobile phone-based method for fatigued driving in [4] Automobiles [24][25]. The proposed technique distinguishes between drowsiness in three periods. A modified eye state arrangement is utilised on the main stage. a way to gauge the degree of eyelid closure (PERCLOS) using pictures taken with the front camera. The last check step is employed as a contact reaction within a set amount of time to classify the driver as fatigued and so maintain a warning. Feng et al. (2019) developed a constant driving laziness recognition computation that takes the person into consideration in [5].

Differences among drivers A deep feeling convolutional neural system were developed to distinguish the face area, which gets around the problem produced by fictitious element extraction, of helpless accuracy. The frontal driver face milestones in a case are identified using the Toolkit for Dlib. The Eyes Aspect Ratio is another barrier that is used to assess driver fatigue, as described by the milestones in eye. In this study, face landmark detection is accomplished using pre-existing characteristics[11]. The technique makes use of the 68-facial landmark (a predetermined landmark) for shape prediction in order to distinguish different facial features, such as the eye brows, the eye, the mouth, etc][12][13] [26].

- Utilizing the Viola Jones Algorithm, enter the image and correctly identify the face [27].
- Easily distinguish 68 points to locate (x coordinate different regions of the face [28].
- Locate the markers to find the mouth, eye, and other areas [29].
- Changes in the region's form indicate different sleepiness and weariness expressions [30].

Each extracted frame is evaluated to explore the pattern of facial characteristics using Dlib face predictor and Dlib face detector, which calculate the eye aspect ratio (EAR) and mouth aspect ratio (MAR) for each frame. High vision cameras are implanted to monitor, collect, and extract frames one by one. A blink and a yawn are considered when the EAR and MAR values are above their respective threshold levels. If eye blinking rate and yawns are detected for a certain number of consecutive frames, the system warns the driver by playing an alarm. The alarm is sounded to get the driver's attention and continues to ring until the driver awakens[14][15] [31].

III. DRIVER DREAMY CAUSERS

Possessing force, the four crucial factors of sleep, work, time of day, and exercise are frequently the causes of fatigue. People always attempt to do more throughout the day, and as a result, they are losing valuable sleep. People frequently keep falling asleep by using various stimulants, such coffee. The person has insomnia for a few days until their body finally gives up and they fall asleep. The body can constantly be affected by the factors of the time of day [32][33]. When the body should be sleeping, the human mind is ready to ponder. Often associated with Dawn and dusk. The casing receives a signal from the mind that it should rest between 2 AM and 6 AM. The mind

communicates to the casing that it needs to relax. The edges will begin to break down as the rest period is extended [34][35].

1. The human mind can drift off to sleep in the late hours. In any case, this is the time when the most practical automobiles are on the road. Because drivers may sleep more soundly even in the evening than they do during the day, this results in an increase in sleep-related driving incidents [9] [36].
2. According to observation, uninvited drivers are more frequently treated sleepily than those who suppress industrial vehicles, particularly vans [10]. That is primarily due to enhanced staff telephones and increased pay for overtime in drawings at scheduled times throughout the day [37][38].
3. An excessive amount of sketching may be tough and stressful, which frequently causes sleeplessness throughout the day [39].
4. Driver tiredness typically occurs when the persuading element hasn't had a good night's sleep in the previous 24 hours. The average person needs at least 7 hours of sleep every day to be healthy.
5. Because of the unusual hours in the drawings, a number of factors, such as rest problems including sleep deprivation, Sleep Apnea, and Shift work rest jumble (SWSD), may occur.

IV. EXISTING SYSTEM

Accidents as a result of somnolence are often controlled and prevented with the assistance of an eye fixed blink detector mistreatment IR rays. It includes an IR transmitter Associate in Nursing Associate in Nursing IR receiver. The transmitter transmits IR rays into the attention. If they shut the attention, then the output is high. When the attention is open, the output is low. This output is coupled to associate in Nursing alarm each within and out of doors the vehicle. This module is often connected to the vehicle's braking system and want to scale back the vehicle's speed. The alarm within the vehicle can press on for a short while until the driving force is back to his senses[16]. If the driving force is unable to regain management of the vehicle when the assigned time, the alarm outside the vehicle can sound and alert others to help the driving force [40].

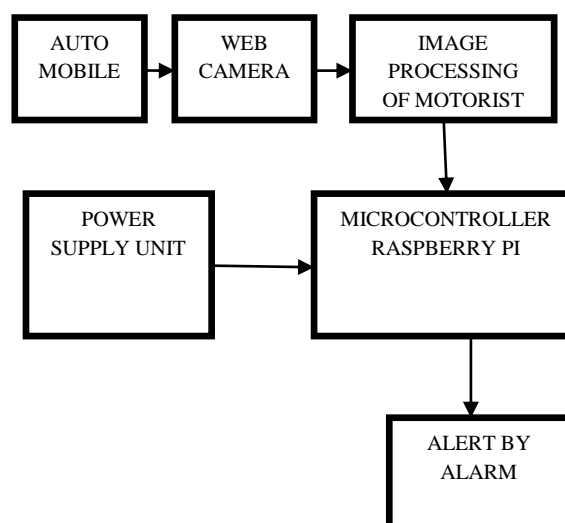


Fig: 1 Existing System

V. PROPOSED SYSTEM

In this project, we have a tendency to sight temporary state in a very driver by watching his or her visual behaviour with a digital camera algorithmic program. This application will browse pictures from a driver's intrinsically digital camera then extract countenance from the picture's victimisation the OPENCV SVM algorithmic program. If the driving force within the image blinks his eyes for twenty frames in a very row or yawns, the applying can give notice him of his temporary state[17][18]. Are constantly checking or predicting eyes distance nearer to temporary state; if the gap is nearer to drowsiness, the applying can notify the driving force. Lethargic driving is not one of the major reasons in automotive accident and mortalities. Thus, sleuthing driver fatigue and its symptoms is energetic analysis area. The most of historical methods were either physiologically, behaviourally, or vehicle-based[19]. A digital camera records the video of the motorist within the developed system, also the motorist's face is sensed in every set of frame victimisation image process method. The attention ratio, mouth gap quantitative relation, and nose length quantitative relation square measure computed from the discovered face's facial landmarks, and temporary state is recognized supported their values utilizing created adaptational thresholding.

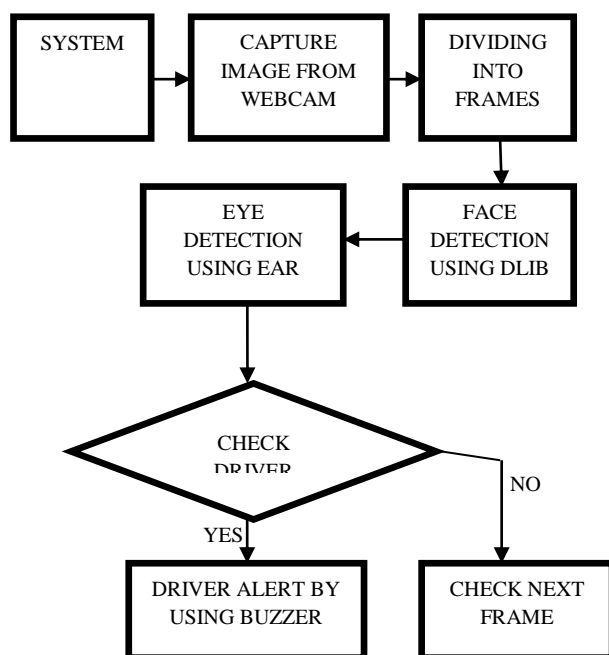


Fig: 2 Proposed System

A) GATHERING VIDEO

By specifying the acceptable parameters, you'll be able to additionally specify whether or not the video ought to be collected via the inherent digital camera or from Associate in nursing external camera. As antecedental explicit, OpenCV doesn't specify any minimum camera requirements; but, by default, OpenCV needs a selected video resolution, if this demand isn't met then OpenCV can run into miscalculation. So as to not encounter such miscalculation, we tend to should not consider the default resolution.

B) BREAKING UP INTO FRAMES

After getting the video, it should be divided it into a sequence of frames/images. This was originally disbursed in 2 steps. The terribly 1st action is to require a frame out from camera or a video file; in our situation, as a result of the video isn't preserved, the frame is directly obtained from the camera; subsequently, the image/frame is retrieved throughout the retrieval method rather than the higher than steps, we have a tendency to use a operate that obtains the frame and offers back a decompressed frame.

C) FACE DETECTION

The next step is to identify the face in each of these edges once the frames have been

successfully separated. Here is face recognition is carried out using the Dlib file. The Dlib file includes numerous facial highlights. It is constructed by using a variety of both positive and negative examples, like stature, width, and the boundaries of facial tones. First, we load the Dlib file for face detection. The captured frame is then passed to a footing detection programme that analyses all conceivable objects of various sizes within the frames. as a result of the face of the car driver takes up an oversized portion of the image, we are able to specify the edge detector to detect solely objects of a selected size, that is decided by the Dlib file, wherever every Dlib file is designed for a selected size[20]. The sting detector's results currently saved as associate array. To spot the face within the frame, the sting detector's output is compared to the cascade file. The quantity of failures on that associate object known ought to be classed as a negative sample because the cascade contains each positive and negative samples. We've set this worth in our system. In our system, we have a tendency to set this value to 6 that helped in achieving each accuracy yet as less interval. This module's output may be a frame with a face recognized in it.

D) EYE DETECTION

Following the detection of the face, consequent stage is to observe the eyes, which may be done mistreatment constant methodology because the face detection. However, before trying to observe eyeballs, we tend to mark the region of interest to limit the number of processes.

E) ATTENTION DETECTION

After police investigation the eyeballs, consequent stage is to ascertain if they're closed or open. The element values from the ocular region area unit extracted to attain this. When extracting, we tend to check to visualize if these element values area unit white; if they're, it suggests that the eyes area unit open; if they are not, it suggests that the eyes area unit closed. This can be meted out for every and each frame that's extracted. The car driver is taken into account worn-out if his or her eyes area unit closed for 2 seconds or a given range of consecutive frames, according on the frame rate. We tend to think about it as a blink if the eyes area unit closed non-consecutive frames. A text

message is shown in conjunction with Associate in nursing loud alarm if somnolence is detected. However, the system was found to be unable to run a drawn-out amount of your time since the conversion of the captured video from RGB to grayscale spent an excessive amount of memory. Rather than remodelling the video to grayscale, the RGB video was simply used for process to resolve this drawback.


F) SOUNDING AN ALARM

When the trigger is activated following tiredness detection in the system, a sys module eventually produces the Beep sound at frequency 3500. Once the driver doesn't start acting normally again, the system will go into alert mode.

VI. RESULTS & DISCUSSIONS

Our suggested technique has been successfully implemented on a Corei5 8th generation portable PC running computer vision with 8GB of RAM and a 0.9MP (1280 * 720) built-in web camera. This test evaluated that our system's output is confirmed by several users in a variety of settings. Even when faced with significant barriers like spectacles, poor lighting, acoustics, etc., the system operates with great accuracy.

- A) The system indicates that you are Active if the Eye Aspect Ratio is higher than 0.2

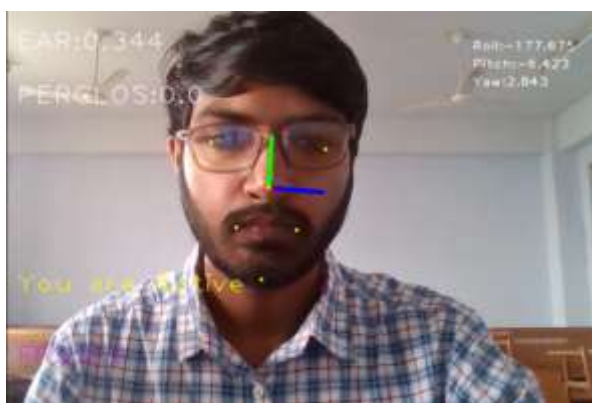

Screenshot 1

- B) The system detects drowsiness if the eye aspect ratio is more than 0.20 and less than 0.25



Screenshot 2

- C) The system indicates that you are sleepy if the eye aspect ratio is lower than 0.20.



Screenshot 3

- D) The system detects distraction when a person turns their head away.



Screenshot 4

TABLE I. OBSERVATION TABLE

Test	Machine observation	Actual observation	result
1	drowsy	drowsy	pass
2	sleepy	sleepy	pass
3	active	active	pass
4	active	sleepy	fail
5	drowsy	drowsy	pass
6	sleepy	drowsy	fail
7	active	active	pass

VII. CONCLUSIONS

This project's main purpose is to make a time period temporary state observation system for autos. We have a tendency to create an easy system with 5 modules: video acquisition, frame division, face detection, eye detection, and somnolence detection. Every of those parts will be done individually, providing you with the way to prepare them supported your preferences. Every of those parts will be dead severally, providing you with the choice of structuring them in line with your desires. Our system differs from others in four ways: (a) concentrate to the motive force that could be an easy approach to notice temporary state. (b) A system that's totally non-intrusive. (c) A system that detects face, iris, blink, and driver fatigue in real time. (d) Utilize cheaply. The average real-time test accuracies achieved using Dlib for Eye Detection Accuracy and Drowsiness Accuracy were determined to be 80.25% and 78.60%, respectively.

VIII. FUTURE SCOPE

Systems that detect driver sleepiness are intended to warn drivers when they are in danger of nodding off behind the wheel. These programmes monitor drivers' actions and warn them when they exhibit indications of intoxication using a number of technologies. The incorporation of new sensor technologies is one area where these systems will undergo future development. Several drowsiness detection systems in use today use sensors to keep a watch on the driver's facial expressions and eye movements. Some sensors, such as those that monitor head position and body posture, however, may be able to identify sleepiness more precisely. The application of machine learning methods to increase the precision of sleepiness detection is another promising area for research. Machine learning algorithms might be trained to more precisely anticipate when a motorist is at risk of dozing off by evaluating vast quantities of data on driving behaviour.

REFERENCES

- [1] Distance, D'Orazio.T, Guaragnella.C and Leo.M, —A visual approach for driver inattention detection, *IPattern Recogn.*, vol. 40, no. 8, 2007, pp. 2341– 2355.
- [2] S. Singh, N. P. papanikolopoulos, "Monitoring Driver Fatigue using Facial Analysis Techniques", *IEEE Conference on Intelligent Transportation System*, pp 314-318
- [3] R. Ahmad, and J. N. Borole, "Drowsy Driver Identification Using Eye Blink Detection," *IJISET - International Journal of Computer Science and Information Technologies*, vol. 6, no. 1, pp. 270-274, Jan. 2015.
- [4] Agarwal, V. Murali, N. V., and Chandramouli C. 2009. "A cost-effective ultrasonic sensor-based driver assistance system for congested traffic conditions," *IEEE transactions on intelligent transportation systems* (10:3), pp 486-498
- [5] Eriksson, M and Papanikolopoulos, N.P. "Eye-tracking for Detection of Driver ,Fatigue", *IEEE Intelligent Transport System Proceedings* (1997), pp 314-319.
- [6] Narayan, Vipul, and A. K. Daniel. "CHOP: Maximum coverage optimization and resolve hole healing problem using sleep and wake-up technique for WSN." *ADCAIJ: Advances in Distributed Computing and Artificial Intelligence Journal* 11.2 (2022): 159-178.
- [7] Narayan, Vipul, and A. K. Daniel. "CHHP: coverage optimization and hole healing protocol using sleep and wake-up concept for wireless sensor network." *International Journal of System Assurance Engineering and Management* 13.Suppl 1 (2022): 546-556.
- [8] Narayan, Vipul, and A. K. Daniel. "FBCHS: Fuzzy Based Cluster Head Selection Protocol to Enhance Network Lifetime of WSN." *ADCAIJ: Advances in Distributed Computing and Artificial Intelligence Journal* 11.3 (2022): 285-307.
- [9] Narayan, Vipul, et al. "E-Commerce recommendation method based on collaborative filtering technology." *International Journal of Current Engineering and Technology* 7.3 (2017): 974-982.
- [10] Srivastava, Swapnita, and Shilpi Sharma. "Analysis of cyber related issues by implementing data mining Algorithm." *2019 9th International Conference on Cloud Computing, Data Science & Engineering (Confluence)*. IEEE, 2019.
- [11] Rahul Atul Bhoje, "Computer Vision based drowsiness detection for international conference on Internet of things, IEEE, Ghaziabad, India, 2019.
- [12] Aditya Ranjan, Karan Vyas, Sujay Ghadge, Siddharth Patel, *Suvarna Technology (IRJET)*, 2020
- [13] M. Ali, S. Abdullah, C. S. Raizal, K. F. Rohith and V. G. Menon, "A Novel and Efficient Real Time Driver Fatigue and Yawn Detection-Alert System," *2019 3rd International Conference on Trends in Electronics and Informatics (ICOEI)*, 2019, pp. 687- 691, doi: 10.1109/ICOEI.2019.8862632.
- [14] Diwankshi Sharma, Sachin Kr Gupta*, Aabid Rashid, Sumeet Gupta, Mamoon Rashid, Ashutosh Srivastava "A novel approach for securing data against intrusion attacks in unmanned aerial vehicles integrated heterogeneous network using functional encryption technique", *Transactions on Emerging Telecommunications Technologies*, Wiley, 32(7) pp: 1-32, 2020.

- [15] Bagus G. Pratama, IgiArdiyanto, Teguh B. Adji, "A Review on Driver Drowsiness Based on Image, Bio-Signal, and Driver Behavior", IEEE, July 2017
- [16] SaeidFazli, Parisa Esfehiani, "Tracking Eye State for Fatigue Detection", ICACEE, November 2012. Gao Zhenhai, Le DinhDat, Hu Hongyu, Yu Ziwen, Wu Xinyu, "Driver Drowsiness Detection Based on Time Series Analysis of Steering Wheel Angular Velocity", IEEE, January 2017
- [17] Cyun-Yi Lin, Paul Chang, Alan Wang, Chih-Peng Fan, "Machine Learning and Gradient Statistics Based Real-Time Driver Drowsiness Detection", 2018 IEEE International Conference on Consumer Electronics-Taiwan (ICCE-TW).
- [18] Kyong Hee Lee, Whui Kim, Hyun Kyun Choi, Byung Tae Jang, "A Study on Feature Extraction Methods Used to Estimate a Driver's Level of Drowsiness", International Conference on Advanced Communications Technology (ICACT), 2019
- [19] Ashish Kumar, Rusha Patra, "Driver Drowsiness Monitoring System using Visual Behaviour and Machine Learning", IEEE Conference, 2018.
- [20] Hitendra Garg Drowsiness Detection of a Driver using Conventional Computer Vision Application, 2020 International Conference on Power Electronics & IOT Applications in Renewable Energy and its control (PARC), Mathura, Uttar Pradesh, India
- [21] Narayan, Vipul, et al. "Enhance-Net: An Approach to Boost the Performance of Deep Learning Model Based on Real-Time Medical Images." *Journal of Sensors* 2023 (2023).
- [22] Babu, S. Z., et al. "Abridgement of Business Data Drilling with the Natural Selection and Recasting Breakthrough: Drill Data With GA." Authors Profile Tarun Danti Dey is doing Bachelor in LAW from Chittagong Independent University, Bangladesh. Her research discipline is business intelligence, LAW, and Computational thinking. She has done 3 (2020).
- [23] NARAYAN, VIPUL, A. K. Daniel, and Pooja Chaturvedi. "FGWOA: An Efficient Heuristic for Cluster Head Selection in WSN using Fuzzy based Grey Wolf Optimization Algorithm." (2022).
- [24] Faiz, Mohammad, et al. "IMPROVED HOMOMORPHIC ENCRYPTION FOR SECURITY IN CLOUD USING PARTICLE SWARM OPTIMIZATION." *Journal of Pharmaceutical Negative Results* (2022): 4761-4771.
- [25] Narayan, Vipul, A. K. Daniel, and Pooja Chaturvedi. "E-FEERP: Enhanced Fuzzy based Energy Efficient Routing Protocol for Wireless Sensor Network." *Wireless Personal Communications* (2023): 1-28.
- [26] Tyagi, Lalit Kumar, et al. "Energy Efficient Routing Protocol Using Next Cluster Head Selection Process In Two-Level Hierarchy For Wireless Sensor Network." *Journal of Pharmaceutical Negative Results* (2023): 665-676.
- [27] Paricherla, Mutyalaiiah, et al. "Towards Development of Machine Learning Framework for Enhancing Security in Internet of Things." *Security and Communication Networks* 2022 (2022).
- [28] Sawhney, Rahul, et al. "A comparative assessment of artificial intelligence models used for early prediction and evaluation of chronic kidney disease." *Decision Analytics Journal* 6 (2023): 100169.
- [29] Srivastava, Swapnita, et al. "An Ensemble Learning Approach For Chronic Kidney Disease Classification." *Journal of Pharmaceutical Negative Results* (2022): 2401-2409.
- [30] Mall, Pawan Kumar, et al. "FuzzyNet-Based Modelling Smart Traffic System in Smart Cities Using Deep Learning Models." *Handbook of Research on Data-Driven Mathematical Modeling in Smart Cities*. IGI Global, 2023. 76-95.
- [31] Mall, Pawan Kumar, et al. "Early Warning Signs Of Parkinson's Disease Prediction Using Machine Learning Technique." *Journal of Pharmaceutical Negative Results* (2022): 4784-4792.
- [32] Pramanik, Sabyasachi, et al. "A novel approach using steganography and cryptography in business intelligence." *Integration Challenges for Analytics, Business Intelligence, and Data Mining*. IGI Global, 2021. 192-217.
- [33] Narayan, Vipul, et al. "Deep Learning Approaches for Human Gait Recognition: A Review." 2023 International Conference on Artificial Intelligence and Smart Communication (AISC). IEEE, 2023.
- [34] Narayan, Vipul, et al. "FuzzyNet: Medical Image Classification based on GLCM Texture Feature." 2023 International Conference on Artificial Intelligence and Smart Communication (AISC). IEEE, 2023
- [35] Mahadani, Asim Kumar, et al. "Indel-K2P: a modified Kimura 2 Parameters (K2P) model to incorporate insertion and deletion (Indel) information in phylogenetic analysis." *Cyber-Physical Systems* 8.1 (2022): 32-44.
- [36] Singh, Mahesh Kumar, et al. "Classification and Comparison of Web Recommendation Systems used in Online Business." 2020 International Conference on Computation, Automation and Knowledge Management (ICCAKM). IEEE, 2020.
- [37] Awasthi, Shashank, Naresh Kumar, and Pramod Kumar Srivastava. "A study of epidemic approach for worm propagation in wireless sensor network." *Intelligent Computing in Engineering: Select Proceedings of RICE 2019*. Springer Singapore, 2020.
- [38] Srivastava, Arun Pratap, et al. "Stability analysis of SIDR model for worm propagation in wireless sensor network." *Indian J. Sci. Technol* 9.31 (2016): 1-5.
- [39] Ojha, Rudra Pratap, et al. "Global stability of dynamic model for worm propagation in wireless sensor network." *Proceeding of International Conference on Intelligent Communication, Control and Devices: ICICCD 2016*. Springer Singapore, 2017.
- [40] Shashank, Awasthi, et al. "Stability analysis of SITR model and non linear dynamics in wireless sensor network." *Indian Journal of Science and Technology* 9.28 (2016)