



PREDICTION OF STEEL FIBRE REINFORCED CONCRETE STRENGTH BY USING 3 INDEPENDENT PIE TERMS WITH RESPONSE SURFACE METHODOLOGY (RSM) MODEL

A.M. Shende^{1*}, A.D.Kadam²

Abstract:

The object of the present research paper is to develop Response surface methodology (RSM) Models from three independent pi terms. (Aspect ratio, percentage of fibre and control strength for prediction of SFRC strength). The output of this RSM model can be evaluated by comparing it with experimental strength and the predicted RSM model strength. The study becomes more fruitful when my using same model three SFRC strength were predicted that is compressive strength, flexural strength and split tensile strength.

Keywords: RSM model; 3 independent π Terms: predicted SFRC strength

^{1*}Faculty of Civil Engineering, Priyadarshini J. L. College of Engineering, Nagpur, India,
Email: abhaymshende3@gmail.com

²Faculty of Mechanical Engineering, Priyadarshini J.L. College of Engineering Nagpur, India,
Email: anjalikadam.d@gmail.com

***Corresponding Author:** A.M. Shende

*Faculty of Civil Engineering, Priyadarshini J. L. College of Engineering, Nagpur, India,
Email: abhaymshende3@gmail.com

DOI: 10.48047/ecb/2023.12.si5a.0542

1.Introduction:

To arrive at mathematical model, the course of action started with development of some foundation mathematical relations and then arriving at some single generalized equations. Mathematical models are developed to predict the strength of SFRC for different grade of concrete, for different Aspect ratio and different percentage of steel [5-8] [9-13] Shende .A.M et.al [7-10] studied the investigation for 1) Grade of concrete M20, M30 and M40 2) Aspect Ratio 50, 60 and 67 3) Percentage of steel fibres 0%, 1%, 2% and 3%.The mathematical modeling to calculate predicted compressive strength, flexural strength and split tensile strength of SFRC are studied by shende [4] in 2013.In this paper an effort is made to extend the work by developing RSM model by using three independent π terms that is control strength, percentage of steel fibre & Aspect ratio for the prediction of steel fibre reinforced concrete compressive strength ,flexural And split tensile strength.

Response Surface Methodology (RSM) Models
Response surface methodology (RSM) is a collection of mathematical and statistical techniques that are useful for the modeling and analysis of problems in which a response of interest is influenced by several variables and the aim is to optimize this response.

The objective of Response Surface Methodology is:

- How is a particular response affected by a given set of input variables over some specified region of interest?
- What values of the inputs will yield a maximum (or minimum) for a specific response?
- What is the relationship response-factors like close to this maximum (or minimum)?

For instance, suppose we wish to find the levels of two factors x_1, x_2 that maximize the response variable y of a process:

$$y = f(x_1, x_2) + \varepsilon (\text{Noise})$$

The surface represented by $\eta = f(x_1, x_2)$ is called a response surface, graphically represented as a solid surface in a three-dimensional space. In the contour plot, lines of constant response are drawn in the x_1, x_2 plane, which help visualize the shape of the response surface. Each contour corresponds to a particular height of the response surface. Such a plot is helpful in studying the levels of x_1 and x_2 that result in changes in the shape or height of the response surface.

As an important subject in the statistical design of experiments, the Response Surface Methodology (RSM) is a collection of mathematical and statistical techniques useful for the modeling and analysis of problems in which a response of interest is influenced by several variables and the objective is to optimize this response (Montgomery 2005). As per the dimensional analysis, following π terms are developed. These π terms are dimensionless hence it is very easily possible to convert into three groups. These groups are converted into 3 dimensions in space to develop response surface [1] [3]

Steps in Response Surface Methodology

- To find a suitable approximation for the true functional relationship between y and the set of independent variables (usually, a low-order polynomial in some region of the independent variables: first-order model, or second-order model if there is curvature in the system).
- To estimate the parameters in the approximating polynomials (to find the maximum response, for instance).
- To do the response surface analysis in terms of the fitted surface. If the fitted surface is an adequate approximation of the true response function, then analysis of the fitted surface will be approximately equivalent to analysis of the actual system.

Response Surface Design

As per the dimensional analysis, six π terms are developed. These π terms are dimensionless hence it is very easily possible to convert into three groups. These three groups are converted into 3 dimensions in space to develop response surface.

Hence,

$$X = \pi_1 \times \pi_2$$

$$Y = \pi_3$$

$$Z = \pi_4 \dots \dots \dots (1.1)$$

The ranges of input X, Y and output Z are more variant. Hence by using scaling principle, the above X, Y and Z values are scaled as follows:

$$x = X / \max (X), y = Y / \max (Y), \text{ and } z = Z / \max (Z) \dots \dots \dots (1.2)$$

RSM Model Development

The experimental data are collected, with the process parameter levels set as given in observation table to study the effect of process parameters over the output parameters.

The experiments are designed and conducted by employing response surface methodology (RSM).

The selection of appropriate model and the development of response surface models have been carried out by using statistical software, "MATLAB R2009a". The best fit regression equations for the selected model are obtained for the response characteristics, viz., and prediction

of SFRC Strength. The response surface equations are developed using the field data and are plotted (figure 2) to investigate the effect of process variables on various response characteristics.

Table No. 1.0: Shows Π values and experimental strength (First and Last 20 readings are reported)

X= $\Pi_1*\Pi_2$	Y= Π_3	Experimental data
30.45	60	35.9
45.675	60	39.06
60.9	60	39.74
22.8375	60	39.6
15.225	60	35.3
34.25625	60	30.14
22.8375	60	36.83
45.675	60	34.99
30.45	60	37.21
15.225	60	34.9
18.3	50	38.43
27.45	50	37.4
36.6	50	37.5
21.875	55	45.47
32.8125	55	47.54
43.75	55	50.64
21.875	55	50.3
32.8125	55	50.99
43.75	55	51.74
5.52	50	2.26
4.68	60	2.48
4.68	67	2.15
7.29	50	3.68
6.87	50	3.11
6.45	50	3.33
7.29	60	3.4
6.87	60	2.97
6.45	60	3.14
7.29	67	3.18
6.87	67	2.83
6.45	67	3.04
9.33	50	4.25
9.78	50	4.39
8.49	60	4.25
9.33	60	4.1
9.78	60	4.39
8.49	67	3.82
9.33	67	4.25
9.78	67	4.53

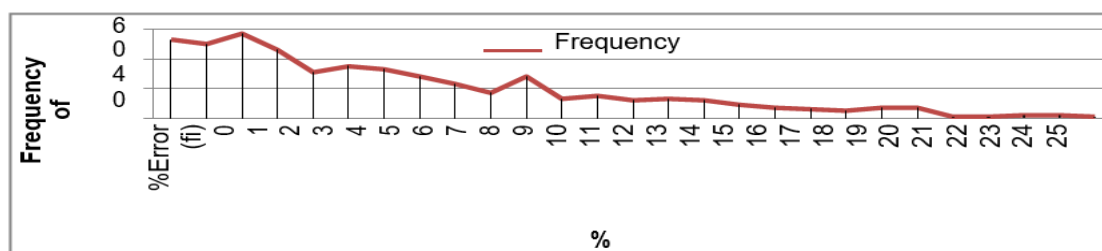


Figure No 1 % Error vs Frequency graph for Pi01: predicted SFRC Strength

Linear model Poly55:

$$f(x,y) = p00 + p10*x + p01*y + p20*x^2 + p11*x*y + p02*y^2 + p30*x^3 + p21*x^2*y + p12*x*y^2 + p03*y^3 + p40*x^4 + p31*x^3*y + p22*x^2*y^2 + p13*x*y^3 + p04*y^4 + p50*x^5 + p41*x^4*y + p32*x^3*y^2 + p23*x^2*y^3 + p14*x*y^4 + p05*y^5$$

Predicted SFRC strength by RSM= 28.09+ 30.38*x -3.987*y -10.42*x^2 + 1.048*x*y + 5.295*y^2 -5.806*x^3 + 2.472*x^2*y 4.288*x*y^2 + 2.244*y^3 + 3.706*x^4 -2.748*x^3*y -3.671*x^2*y^2 + 0.9195*x*y^3 -1.126*y^4 -0.4798*x^5 -1.126*x^4*y + 0.6236*x^3*y^2+ 0.9817*x^2*y^3 -1.732*x*y^4 -406*y^5

Goodness of fit:
 SSE: 2.558e+04
 R-square: 0.8422

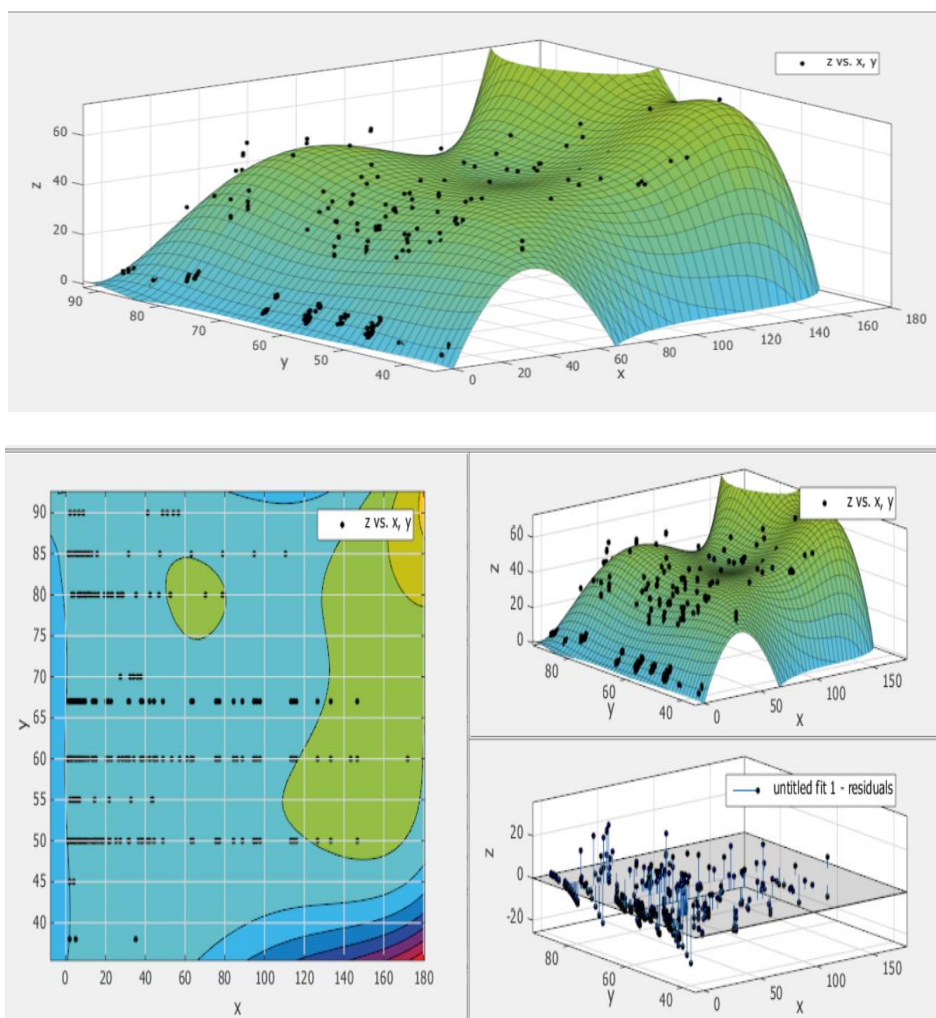


Figure No 2: 3D graph showing Experimental strength Vs Predicted Strength

2.DISCUSSIONS OF 3D GRAPHS:

It is possible to evaluate the behavior of any model through graphical presentation in order to justify how the real Phenomena work on account of appropriate interaction of independent terms. An attempt has been made for the prediction of steel fibre reinforced concrete strength.

In this model there are three independent terms and one dependent term. It is very difficult to plot a 3D graph.

To obtain the exact 3D graph dependent terms is taken on Z-axis where as from three independent terms, three are combined and a product is obtained which is presented on X-axis. The remaining two independent p terms are Combined by taking product and represented on Y-axis.

On X axis X= 2 *3*5 On Y axis Y =1 *4, on Z axis = 01 (predicted SFRC strength)

3.CONCLUSIONS:

RSM model developed for predicting strength of SFRC, using strength of controlled concrete, percentage of fibres, aspect ratio can very well be used in prediction of compressive strength, flexural strength and split tensile strength of SFRC using the three parameters listed above. The significance of this model can very well be seen from the data presented in column experimental strength and the predicted RSM strength. The significance of this model can very well be seen from %Error vs Frequency graph for predicted SFRC Strength

RSM model developed for prediction of compressive strength, Flexural strength and split tensile strength when compared with own observed experimental strength it is observed that predicted strengths and observed experimental strength are close to each other and are found to be within 90% of confidence limit It clearly indicates the reliability of RSM models developed to calculate predicted strength. The best fit regression equations for the selected model are obtained for the response characteristics

References:

1. Shende A. M. The investigation and comparative study on properties of steel fibre reinforced concrete members, Thesis.
2. Shende A. M. & Pande A. M., 2011, "Experimental study and prediction of Tensile Strength for Steel Fiber Reinforced Concrete", International Journal of Civil and Structural Engineering", Vol.1, No 4, pp 910-917.
3. Haroon S. A., Nur Yazdani & Kamal Tawfiq, 2004, Properties of Fibre Reinforced Concrete for Florida Applications, Proceedings of ICFRC, Vol I, pp 135-144.
4. Shende A. M. & Pande A. M., 2011, "Mathematical Model to Calculate Predicted Compressive Strength and Its Comparison with Observed Strength", International Journal of Multidisciplinary Research and Advances in Engg. (IJMRAE), Application, Vol. 3, No. IV, pp 145- 156 .
5. P. Modak & Mrs. S. D. Moghe, "Design & Development of a Human Powered Machine for the Manufacture of Lime-Fly-ash-Sand-Bricks" Human Power Vol. 13, pp 3-8, 1998, Journal of International Human Powered Vehicle Association, U.S.A.
6. Shende A. M. & Pande A. M., 2011, "Comparative study on Steel fibre reinforced cum control concrete under flexural and deflection", International Journal of Applied Engineering Research", Vol. 1, No 4, pp 942 -950.
7. R. Bapat, "Experimental Optimization of a Manually Driven Flywheel Motor" M.E. (By Research) Thesis of Nagpur University 1989, under the supervision of Dr. J. P. Modak.
8. Jagannathan, 2010, Flexural Strength Characteristics of Hybrid Fibre Reinforced Cementitious Matrix, Proceeding of International conference on Innovation, Vol I, pp 347-353.
9. Sashidhar C., Rao H. S. & Ramana N. V., 2004, Strength Characteristics of Fiber-Reinforced Concrete with Metakaolin, Proceedings of ICFRC, Vol I, pp 247-256.
10. Undirwade S. K. et al, "Formulation of Mathematical Model for Resistive Torque Required for Bamboo Sliver Cutting Using HPFM", International conference on Electrical, Electronics Engineering Trends in Communication, Optimization and Sciences (EEECOS), 28 March 2015, Shri Sunflower College of Engineering, Machchalipattanam, Vijaywada.
11. Clifford N. MacDonald, Julian Trangsrud, 2004, Steel Fibre Reinforced Concrete Pre-Cast Pipe, Proceedings of ICFRC, Vol I, pp 19-28.
12. Coutts R.S.P., 2005, A review of Australian research into natural fibre cement composites Cement & Concrete Composites. 27, pp 518-526.
13. Undirwade S. K., Ph.D, thesis on "Formulation of An Approximate Generalized Experimental Data Based Model For Sliver Cutting From Bamboo Energized By Human Powered Flywheel Motor", June -2015.
14. G. Ramachandran "study and implementation of green power in Campus environment" International Journal of Electronics and Communication Engineering and Technology "ISSN Print 0976- 6464 ISSN Online: 0976 -6472.